JUMPING SPIDER

Powered by Geyi Medical

Single-use
Endoscopy Solution



See there,
Be there.

EU-MDR CE FDA 510(k) NMPA ISO 13485

CONTENTS


- Single-use Ureteroscope
- Single-use Cystoscope
- Single-use Hysteroscope
- Single-use Bronchoscope
- Single-use Choledochoscope
- Portable Image Processor


Single-use
Ureteroscope
As Slim as
6.3Fr
JUMPING SPIDER
EU-MDR CE
FDA
510(k)
NMPA
ISO
13485
Quality Management System

PRODUCT **FEATURE**

Slim 6.3 Fr Distal

To support smooth ureteral access and efficient navigation.



Handle Lever

- **1:1** coaxial steering, more smooth operation.
- Two shortcut keys, support user customization, can be preset with up to 15 functions.

240 g Ergonomic Lightweight Handle

Designed for comfortable grip and intuitive scope manipulation.

Y adapter included

packaged with each scope.

3.6 Fr Working Channel

Supports compatible accessories while helping maintain irrigation performance.

275° Responsive Bidirectional Deflection

Designed to provide the flexibility needed to access challenging anatomy with greater control.



Clear Digital Visualization

Digital imaging supports reliable observation throughout the procedure.

PRODUCT **PARAMETER**

Model	Outer Diameter	Working Channel	Working Length (mm)	Bending Angle	Depth of Field (mm)	Viewing Angle	Resolution (pixel)
GY-UR6.3	6.3 Fr	3.0 Fr	670	275° (up & down)	3-50	120°	160, 000
GY-UR7.5	7.5 Fr	3.4 Fr					
GY-UR8.4	8.4 Fr	3.6 Fr					
GY-UR9.3	9.3 Fr	3.6 Fr					

Single-use Cystoscope

One Scope
Two Roles



EU-MDR CE NMPA ISO 13485

PRODUCT **FEATURE**



220° Bidirectional Deflection

U220° /D220° deflection supports controlled navigation and systematic inspection of the bladder.


As Slim as 8.4 Fr

Designed for smooth transurethral access with a slim insertion profile.



120° /140° Field of View

Wide viewing angle supports efficient inspection of the bladder.

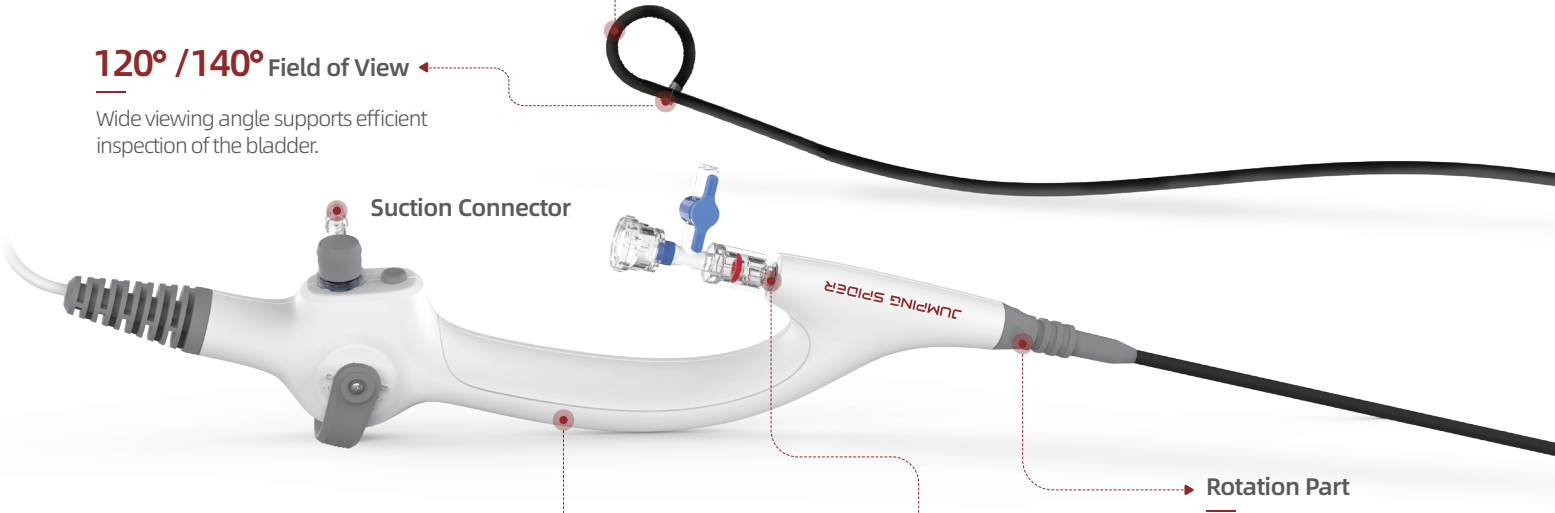

One Scope, Two Roles

8.4 Fr, diagnostic purpose; 15.6 Fr, therapeutic purpose.

Designed for Comfortable Handling

Ergonomic handle design supports intuitive and responsive scope manipulation.

Large Working Channel

Up to 6 Fr, provides room for compatible urological instruments during interventional procedures.

PRODUCT **PARAMETER**

Model	Outer Diameter	Working Channel	Working Length (mm)	Bending Angle	Depth of Field (mm)	Viewing Angle	Resolution (pixel)
GY-CYM084WJQB145 aka:GY-CYM084	8.4 Fr	3.6 Fr	400	220° (up & down)	3-50	120°	160, 000
GY-CYN156WJQA134 aka:GY-CYN156	15.6 Fr	6.0 Fr			3-100	140°	1, 000, 000


Single-use
Hysteroscope

No Dilation

No Anesthesia

See & Treat



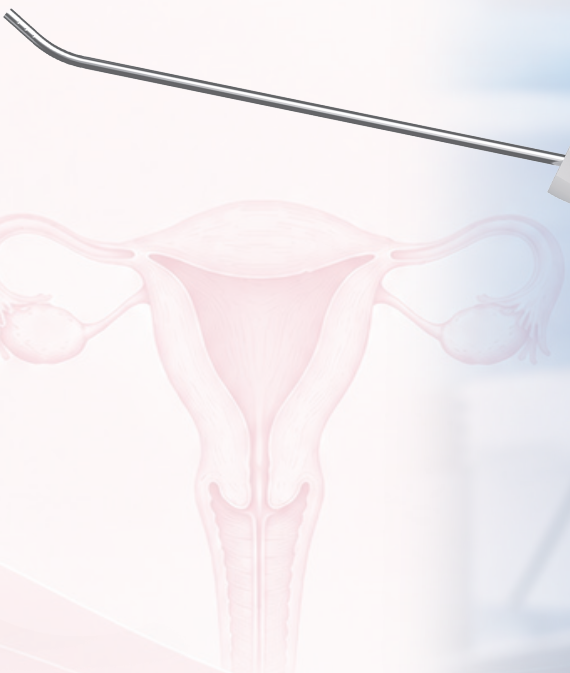

EU-MDR CE FDA 510(k) NMPA ISO 13485

PRODUCT **FEATURE**

4 Types of Bending Angles

0°/12°/22°/30°, it makes operation more convenient.




Dual Shortcut Keys

Support user customization, can be preset with up to 15 functions.

Type-C Connector

Suction Tube

Irrigation Tube

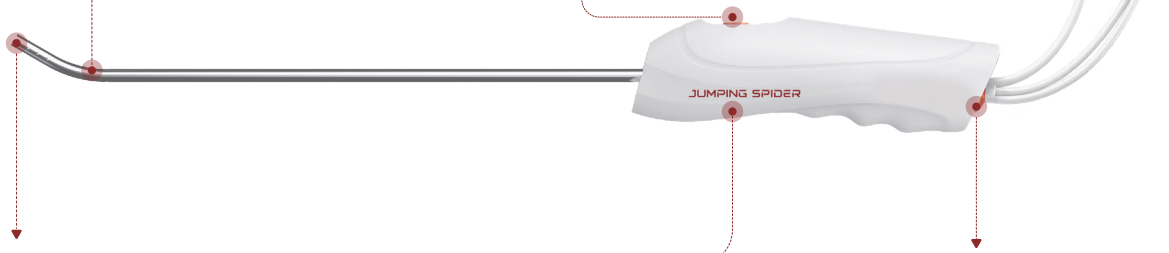

Working Channel

Compatible with 5 Fr and 6 Fr instruments.

Ergonomic Handle

With anti-slip surface treatment.



Dual-channel design

Flow regulator allows for free adjustment of the flow rate; squeezing the tube to its minimum diameter prevents back flow of the liquid, making it easy to operate.

HD Image

- Integrated distal CMOS with dual LED lights delivers clear images.
- Resolution: 160,000 pixels / 1,000,000 pixels, delivers excellent color fidelity.



PRODUCT **PARAMETER**

Model	Outer Diameter (mm)	Working Channel (mm)	Working Length (mm)	Bending Angle	Depth of Field (mm)	Viewing Angle	Resolution (pixel)
GYUT-A 12.6-0	4.2	2.2	220	0°	3-50	120°	160, 000
GYUT-A 12.6-12				12°			
GYUT-B 15-0	5.0	2.0		0°	3-100	140°	1, 000, 000
GYUT-B 15-12				12°			

Single-use **Bronchoscope**


Airway, Always Ready





EU-MDR CE NMPA ISO 13485

PRODUCT **FEATURE**

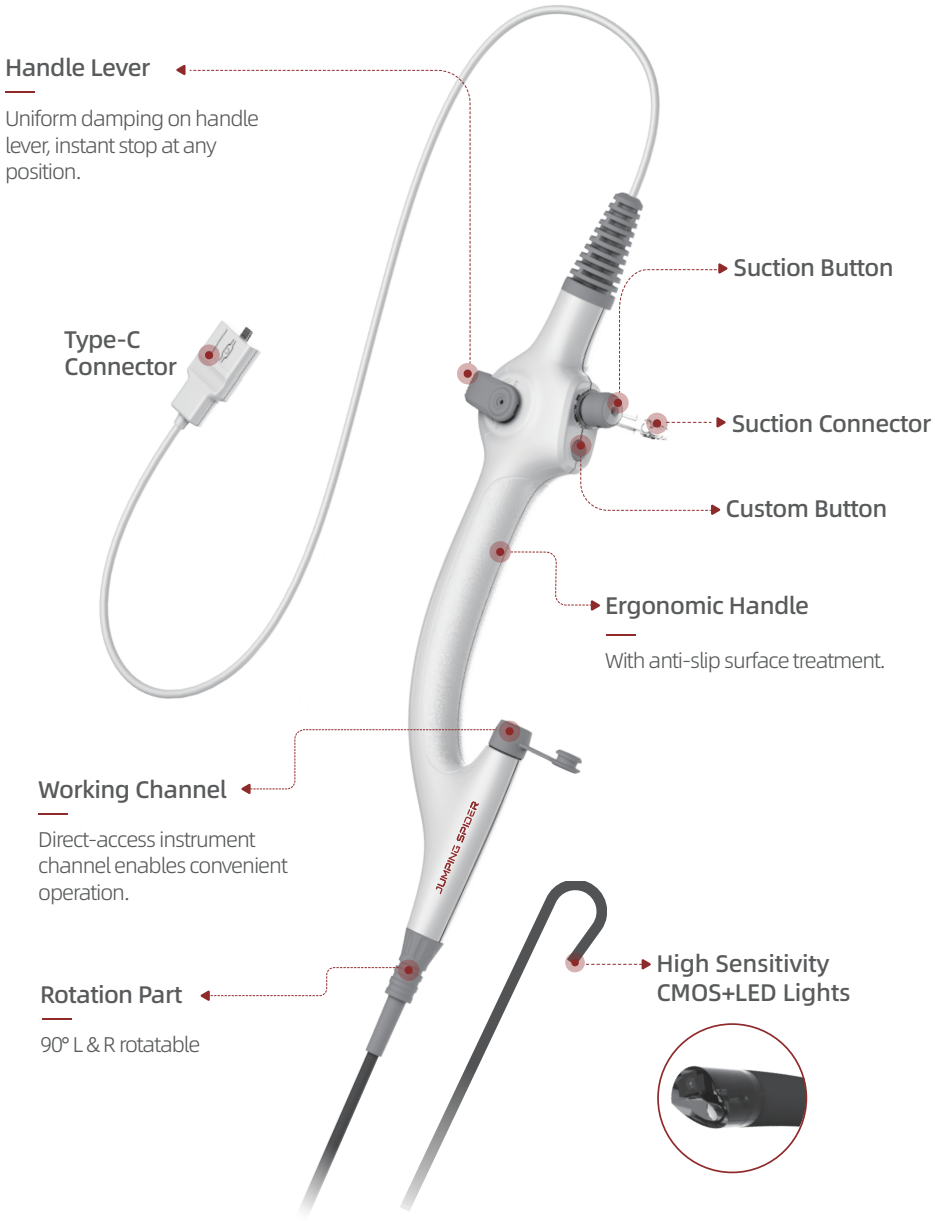

HD Image

Megapixel clear field of view, assists clinical discrimination and observation of bronchial airway tissues.



220°

Bidirectional Bending



Flexible bronchoscope with precise deflection; multiple specifications to meet diagnosis & treatment demands of different patient groups.

PRODUCT **PARAMETER**


Model	Outer Diameter	Working Channel	Working Length (mm)	Bending Angle	Depth of Field (mm)	Viewing Angle	Resolution (pixel)
GY-BRM075A1L	7.5 Fr	3.3 Fr	600	220° (up & down)	3-50	120°	160, 000
GY-BRM084A1L	8.4 Fr	3.6 Fr	600				
GY-BRM120A1L	12.0 Fr	6.0 Fr	600				
GY-BRN147A1L	14.7 Fr	6.6 Fr	600		3-100	140°	1, 000, 000

Single-use
Choledochoscope

Into the Duct, Into View





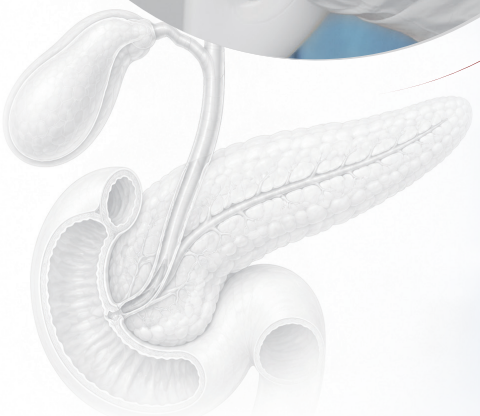

EU-MDR CE NMPA ISO 13485

PRODUCT **FEATURE**



Handle Lever

Uniform damping on handle lever, instant stop at any position.

Suction Button

Type-C Connector

Custom Button

Working Channel

Direct-access instrument channel enables convenient operation.

Ergonomic Handle

With anti-slip surface treatment.

High Sensitivity CMOS+LED Lights



Rotation Part

90° L & R rotatable

HD Image

Megapixel clear field of view, assists clinical observation and differentiation of biliary tract tissues.



220°

Bidirectional Bending



Flexible choledochoscope with precise deflection; multiple specifications to meet diagnosis & treatment demands of different patient groups.

PRODUCT **PARAMETER**

Model	Outer Diameter	Working Channel	Working Length (mm)	Bending Angle	Depth of Field (mm)	Viewing Angle	Resolution (pixel)
GY-CTM075A1BL	7.5 Fr	3.3 Fr	600	220° (up & down)	3-50	120°	160, 000
GY-CTM084A1BL	8.4 Fr	3.6 Fr	600				
GY-CTM120A1BL	12.0 Fr	6.0 Fr	600				
GY-CTM120A1BH	12.0 Fr	6.0 Fr	400				
GY-CTN147A1BL	14.7 Fr	6.6 Fr	600		3-100	140°	1, 000, 000
GY-CTN147A1BH	14.7 Fr	6.6 Fr	400				

Portable
Image Processor

One Tablet, Multiple Endoscopy Solutions.





EU-MDR CE FDA 510(k) NMPA ISO 13485

PRODUCT **FEATURE**

Ureteroscope
Single-use



Cystoscope
Single-use



Choledochoscope
Single-use



Bronchoscope
Single-use



Hysteroscope
Single-use



Compatible With Various Endoscopes

Type-C Connector

12.1" Touch Screen

Intuitive touch operation, 1280 × 800 Display / 1920 × 1080 Extended Output.



Up to 8 Hours Battery

Portable and flexible operation.

32 GB Built-in Storage

Convenient image & video export

Special Features

- Photograph
- Record
- Playback
- LED Adjustment
- Freeze
- White Balance (WB Auto)
- Image Ratio
- Image Zoom in
- Sharpness Adjustment (HD)
- RGB Color Adjustment
- Eliminate Image Reflections
- Multi-Language Support

PRODUCT **PARAMETER**

Model	Video Output	Display Resolution	Built-in Battery
GY-AIO-121	HDMI1.4 1920×1080 (1080P)	1280×800 (720P)	Excluded
GY-AIO-121(A)			Included

Single-use
Endoscopy Solution



GLOBAL DISTRIBUTORS
WANTED



ZHEJIANG GEYI MEDICAL INSTRUMENT CO., LTD.

No. 8, Wanqitaibao Road, Yangxi Subdistrict, Jiande City, Hangzhou, Zhejiang Province, China

info@geyi-medical.com www.geyi-medical.com **www.jumpingspider-med.com**